TCO
SHADING



CASSETTE AWNING

TCO 732 ROUND

Cassette for large sizes, up to 7 m, with 2 to 4 arms

Wind Class 2 | **up to 7.00 × 3.00 m** | **Somfy motor**

General characteristics

The TCO 732 ROUND is designed for **larger sizes**: with reinforced aluminium profiles, stronger than the 530, it reaches **7.00 m in width** and takes **2, 3 or 4 arms**, Standard or LED. Its soft, rounded line suits any façade, and when retracted the fabric is **fully protected** inside the cassette.



The cassette open over a poolside terrace.

Closed cassette
Excellent protection of the fabric from the weather.

2, 3 or 4 arms
Standard with 2 wire ropes, or LED.

Leak-free fabric
Acrylic, sewn or heat-sealed.

Wall or ceiling
Brackets behind the arm mounts.

LED
Optional arms with an LED strip channel, dimmable.

Motor only
Somfy wired or wireless, plus TaHoma.

Colours

White
Standard

Any other RAL
small surcharge

The TCO 732 ROUND comes in **white** as standard. For a small charge it can be coated in **any RAL colour**.

Operation & specifications

Operation

Because of its size, the TCO 732 ROUND runs **only on an electric motor** by Somfy, **wired or wireless**. With **Somfy TaHoma** it can also be controlled remotely. Optional **LED** arms light the space along their full length.

- Somfy wired or wireless motor
- Smartphone control with TaHoma
- LED arms, dimmable




LED arms: continuous light along the full length.


Technical specifications

Type	Cassette awning with folding arms, for large sizes
Width	2.50 – 7.00 m
Projection	**1.80 – 3.00 m**
Arms	**2, 3 or 4 Standard (2 wire ropes) or LED**
Closed cassette	265 × 230 mm on wall · 260 × 270 mm on ceiling
Inclination	Wall 5° – 45° · ceiling 25° – 45°
Mounting	Wall or ceiling · brackets 170 × 130 mm
Fabric	Acrylic, sewn or heat-sealed
Operation	Somfy motor only, wired / wireless · TaHoma
Lighting	LED arms, dimmable (optional)
Wind resistance	Wind Class 2
Colour	White standard · any RAL for a small surcharge
Roller	Ø80 mm
Certifications	ISO 9001 · ISO 14001 · ISO 45001


Technical drawings

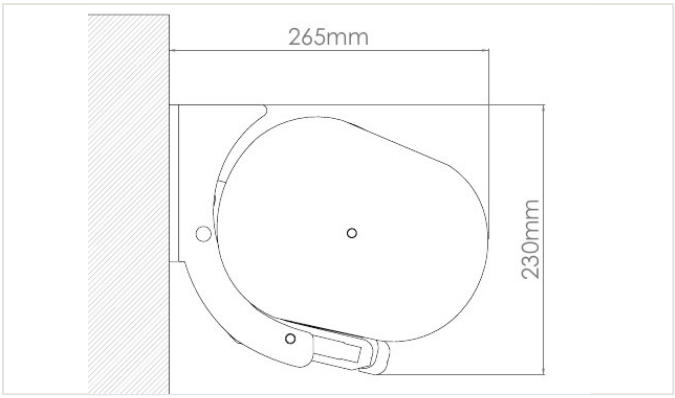


Closed cassette, wall mount

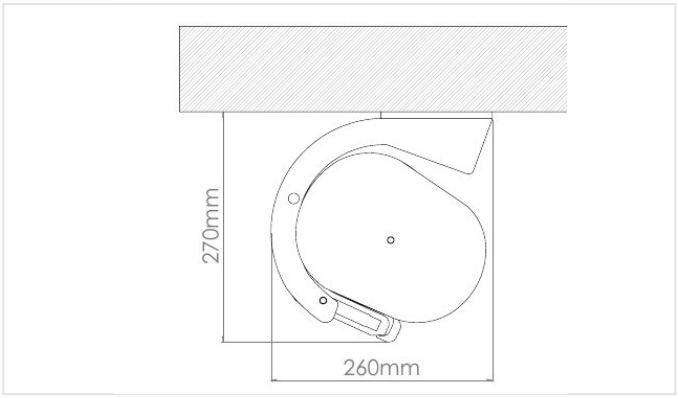

Closed cassette, ceiling mount

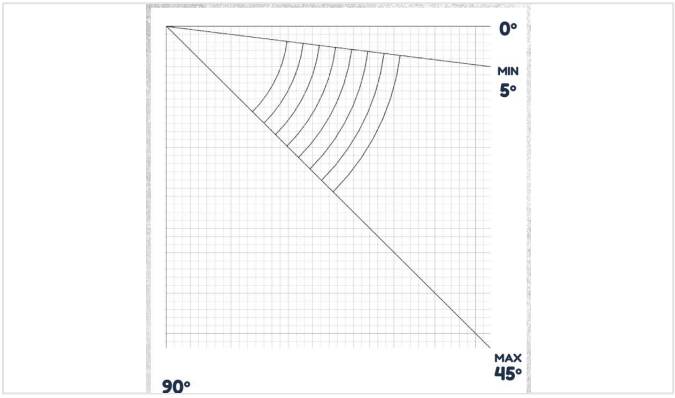


Wall inclination 5° – 45°

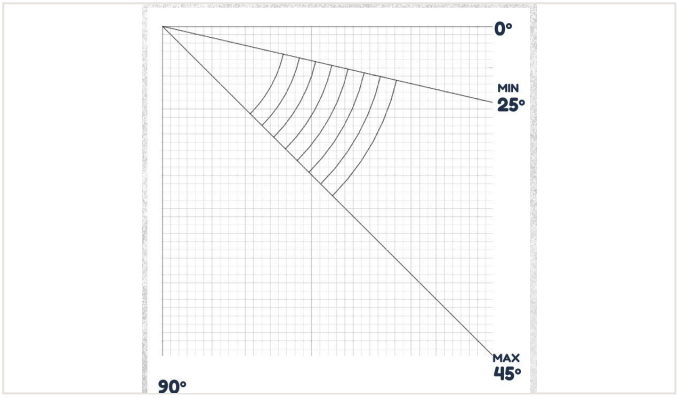


Ceiling inclination 25° – 45°



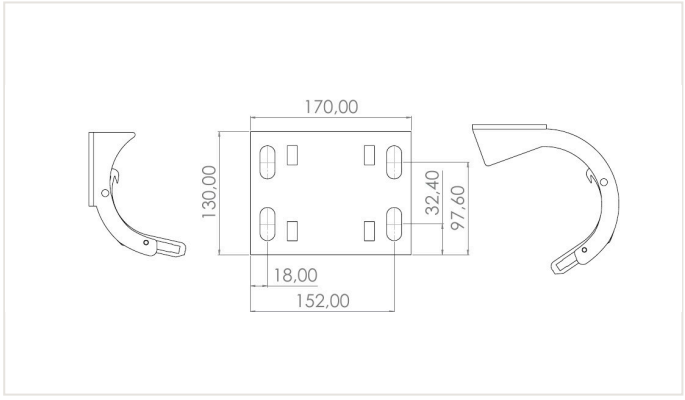

Wall & ceiling brackets · Dimensions in mm

Dimensions

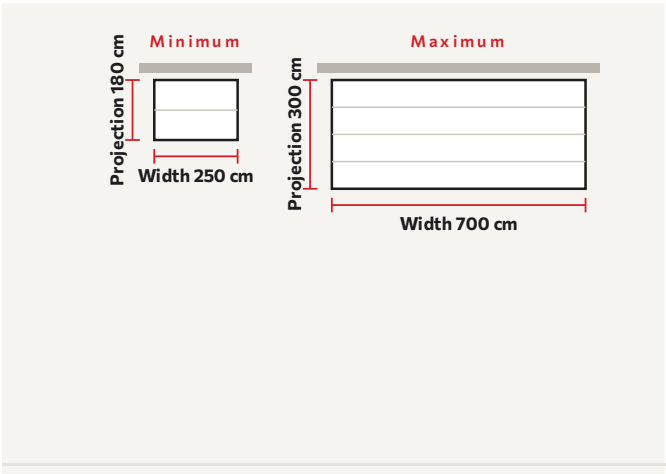

Minimum width for one pair of arms

Arm projection (cm)	180	200	220	250	275	300	320
Minimum width (cm)	227	255	285	320	339	365	389

Applications



TCO 732 ROUND in a residential garden



LED arms in a restaurant

5 YEARS

5-year warranty

On all our products.

Delivery to Switzerland, Belgium and the Netherlands. Installation is a separate service, by arrangement.

TCO Shading · Shading Systems
Akrita 106, Kalamata, Greece
Tel. +30 27210 83058 – 84432
info@tsoukalasco.com · www.tcoshading.com

TCO SHADING